



COMMERCIAL • INDUSTRIAL • RESIDENTIAL

Unique II


Interior/Exterior Acrylic Enamel
Waterborne Acrylic Latex

- Excellent Adhesion & Durability
- Outstanding Block Resistance & Touch-Up
- Exceptional Hide & Coverage
- Superior Gloss & Color Retention
- Low Odor During Application
- Stain & Mildew Resistant



SCAN TO LEARN MORE

A Proven Performer that EXCEEDS Expectations on Delivering a Quality Finish!

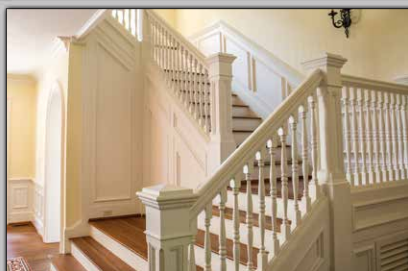

The Rodda Paint Difference



Unique II Interior/Exterior Acrylic Enamels provide High Performance & Versatility that Resists Cracking and Deterioration with Age - A Proven Performer for Long-Term Service Life and Color Retention!

Description:

Unique II is a premium, 100% acrylic, interior/exterior enamel delivering high performance and versatility...A Proven Performer that EXCEEDS expectations on delivering a Quality Finish!

Formulated for **excellent** adhesion with **outstanding** block resistance and touch-up properties, Unique II Low VOC enamels provide **exceptional** hide, coverage and gloss & color retention, as well as **low odor** during application with minimal spatter. Additionally, Unique II Low VOC enamels are stain & mildew **resistant**, easily washable and **resist** cracking & deterioration with age for **greater** long-term service life.

While the Unique II Low Gloss/GL4 and SemiGloss/GL5 are **Low VOC** formulas, **all 3** Unique II finishes are designed to offer superior **interior** performance, including over aged alkyds, yet remain flexible for **exterior** application on doors, siding, fascia & trim and can be applied down to 40F.

Unique II Low VOC enamels are easy to apply with a brush, roller or sprayer and can be complimented with the Unique II Enamel Undercoater for a durable finish on woodwork.

"Unique II is a fantastic product for interior and exterior use. It brushes and rolls nicely and lays out really smooth."

- Anonymous Customer 1

Recommended Uses:

- Designed for Professional Contractors and DIYers alike looking for a premium, durable enamel finish for usage on all **interior & exterior surfaces** such as, properly prepared & primed wood, trim, siding, masonry, brick, concrete, cement, stucco, plaster, EFIS, fiber cement composite, gypsum wallboard, vinyl and pre-painted aluminum siding
- Can also be used on properly primed metal surfaces like gutters and downspouts
- Great choice for high traffic areas, kitchen & bathroom walls, millwork & doors, including front doors & trim
- MPI approved and Exceptionally suited for commercial projects where formal industry quality approvals are required
- An excellent choice for all residential and commercial painting projects
- Versatile and efficient for Commercial Property Maintenance

"This is a great product for painting front/exterior doors. Over time, Unique II resists cracking in the elements and its color retention is unrivaled."

- Anonymous Customer 2

Unique II Technical Data

Sheen	Gloss Level	Base	MPI Approved	VOC	Volume Solids	Film Thickness		Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
						Wet	Dry				
Low Gloss	4	White, Hi-Hide White/Trim, Deep, Neutral	15	< 50 g/L	36% (Varies by Base)	4.4-6.0 mils	1.5-2.0 mils	Not normally recommended. Reduce sparingly with water for spray applications	40F	Dry to Touch: 30 min Dry to Recoat: 8 hrs	Nylon/Polyester Brush 1/4" to 3/4" Nap Synthetic Roller Cover 2000 psi Pressure Airless Spray with .015 - .019 tip
Semi Gloss	5	White, Deep, Neutral	11, 141		35% (Varies by Base)						
Gloss	6	White	114, 119		34% (Varies by Base)						
Undercoater/ Interior Primer	0	White	39	< 80 g/L	39	4.0 mils	1.5 mils		50F	Dry to Touch: 30 min Dry to Recoat: 2 hrs	

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.

Quality, Tradition, Trust Since 1932



6107 N. Marine Drive, Portland, OR
503-521-4300 | 800-452-2315
RoddaPaint.com | Follow Us

Ask your Rodda Paint representative about the Cascadia Color Collection, a nature inspired color palette.

