





COMMERCIAL • INDUSTRIAL • RESIDENTIAL

# RESIST-X

## SCUFF RESISTANT PAINT

The Ultimate Low-Odor, High-Performance Paint for Vibrant, Durable, and Scuff-Resistant Finishes in Any Space!

- "Best-In-Class" Performance
- Scuff-Resistant Paint
- Outstanding Durability and Washability
- Excellent Flow and Leveling
- Exceptional Stain Resistance
- Perfect for Commercial and Residential Projects
- Exceeds MPI High Performance Category Standards
- Low VOC and Low Odor

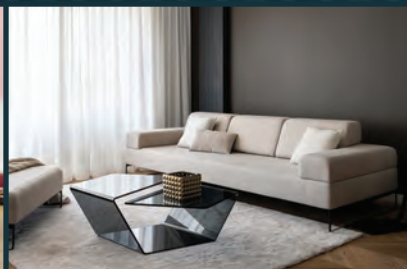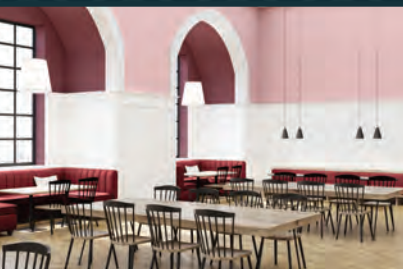

# The Rodda Paint Difference

## Burnish/Scuff Resistance

Competitor 1	Competitor 2	Resist-X
★★★	★★★★	★★★★★

## Scrub/Durability

Competitor 1	Competitor 2	Resist-X
★★	★★★★	★★★★★

## Stain Resistance

Stain	Resist-X	Cleaned with Soap & Water
Coffee	.45%	No change to surface
Graphite	.69%	No change to surface
Ink	.05%	No change to surface

Scale: Change to surface noticeable above 1% when cleaned with soap and water



## What is Scuff Resistance (Paint)?

Scuff-resistant paint is designed to withstand scuffs, stains, and other surface damage in high-traffic areas. This type of paint uses advanced technology to resist wear and tear from frequent contact, such as rubbing, marks, or stains, while preserving the color and sheen. Even if the surface does get scuffed, scuff-resistant paint allows for easy cleaning without affecting the paint's original appearance. It's an ideal choice for places like hallways, stairwells, or commercial buildings where walls are exposed to a lot of activity and need to maintain a clean, fresh look over time.

## Features

- Resistant to Scuffing and Marking
- No scrubbing needed
- Easy soap and water cleaning
- Exceptional Stain Resistance
- Outperforms the very best high-performance quality paints



## Resist-X Technical Data

Sheen	MPI Approved	Gloss Level	Available Sizes	Base	VOC	Volume Solids	Film Thickness		Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
							Wet	Dry				
Matte	#142, #143	1	1G, 5G, Qt.	White	< 10 g/L	41% (Varies by Base and Color)	4.0 - 4.6 mils	1.6 - 1.9 mils	Not normally recommended. Reduce sparingly with water for spray applications	50F	Dry to Touch: 30 mins Dry to Recoat: 2 hrs	Polyester Brush - 3/8"-3/4" nap Synthetic Roller Cover - 10 psi cap pressure, HVLP Spray with 1.3 tip - 2000 psi Pressure Airless Spray with .013-.017 tip
				Deep								
				Neutral								
Satin	#138, #144	2	1G, 5G, Qt.	White		42% (Varies by Base and Color)	4.0 - 4.6 mils	1.5 - 1.7 mils				
				Deep								
				Neutral								
Eggshell	#139, #145	3	1G, 5G, Qt.	White		40% (Varies by Base and Color)	4.0 - 4.6 mils	1.6 - 1.8 mils				
				Deep								
				Neutral								
Semigloss	#141, #147	5	1G, 5G, Qt.	White	41% (Varies by Base and Color)	4.0 - 4.6 mils	1.7 - 1.9 mils					
				Deep								
				Neutral								

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.



COMMERCIAL  
INDUSTRIAL  
RESIDENTIAL

6107 N. Marine Drive, Portland, OR  
503-521-4300 | 800-452-2315  
RoddaPaint.com | Follow Us

Ask your Rodda Paint representative  
about the Cascadia Color Collection,  
a nature inspired color palette.

